

## MINIMALISM DESIGN PENDANT LIGHT

### 极简·吊灯

用简练的线条表达深远的意境，用质朴的设计传达浑粹的气韵，拙朴典雅、不张扬不浮夸，却尽显极简之美。

Express profound artistic conception with concise lines with simple texture to convey the pure charm, simple and elegantly is not ostentatious, but shows the beauty of simplicity.

PRODUCTS:  
LINEAR lighting, SOLAR chairs, METAL<sup>3070</sup> meeting table

U-TEAM 優合  
CORPORATE OFFICE SOLUTION

Product Leaflet

2021

## LINEAR Lighting

简练线条尽显极简之美  
BEAUTY AND PRACTICALITY

质朴 | 气质 | 品质

- SIMPLICITY
- STYLISH
- OPTIMUM

### APPLICABLE PLACE

Office, Working Areas, Meeting & Training,  
Library etc.  
办公室, 工作区, 会议和培训, 图书馆等

U-TEAM 優合  
CORPORATE OFFICE SOLUTION

优合机构·上海总部

上海优合环境工程设计有限公司

上海市闵行区申昆路2377号

虹桥国际展汇3号楼705-706室

U-TEAM | Shanghai Headquarters

U-Team Furnishings Co., Ltd.

Room 705-706, No.3 Building,

PortMix Hongqiao, No.2377 Shenkun Road,

Minhang District, Shanghai 201106 China

优合机构·生产基地

江苏省常熟经济技术开发区万盛路10号

U-TEAM | Manufacturing Base

No.10 Wansheng Road,

Changshu Econ. & Tech. Dev. Zone,

Jiangsu Province 215513 China

☎ 400-021-8800

✉ info@u-team.com.cn



IDEAS  
TO 办公环境·优化整合  
**OPTIMIZE**  
YOUR SPACE

www.u-team.com.cn

UT07/A4/6P/C/2106/CE-1




# LINEAR

## OFFICE LIGHTING 办公照明 · 吊灯

### MINIMALIST DESIGN STYLE 极简主义设计风格

优化环境 | 舒适光源 | 节能环保 | 安装便捷

- Environmental optimization
- Comfortable light source
- Energy-efficient & pro-environment
- Easy installation



现代办公室需要一个整体的灯光解决方案。一个完美的照明解决方案需要结合办公环境，充分考虑灯具的光束角度、照度范围、明度区间等因素，以求达到最好的照明效果。

从初期的照度需求，发展到与天花搭配的美观需求，再发展到功能性、美观性、智能化、人性化的均衡的整体灯光解决方案。我们强调办公环境的整体解决方案，以线条为灵感推出了全新 LINEAR 吊灯系列。

Nowadays, our office really requires a total lighting solution. A perfect lighting solution shall base on office environment, fully consider from all aspects, the beam angle, the illuminance range, the brightness range and other factors of the lamp etc., to achieve the best lighting effect.

From the basic illumination, to further of ~decoration with ceilings, then total lighting solution with functional, aesthetic, intelligent, and humane balanced. We emphasize the overall solution of the office environment and launched a new pendant lamp product series "LINEAR" which, design ideas from the lines.


### DIFFUSER & LIGHT SOURCE 透镜射板 & 光源

阻燃亚克力材质的透镜射板,透光性高,光色均匀, 高品质 LED 灯光源,耗量少,寿命长, 双重光效设计,顶部氛围光效,更显明亮舒适。

Use of flame retardant diffuser acrylic cover, brings high transmission equal light. Top quality LED light has the benefit of long life and low consumption. With atmosphere light at top, double light effect design provide comfortable brighten environment.




### SHADOWLESS JOINTING 无影拼接零暗区

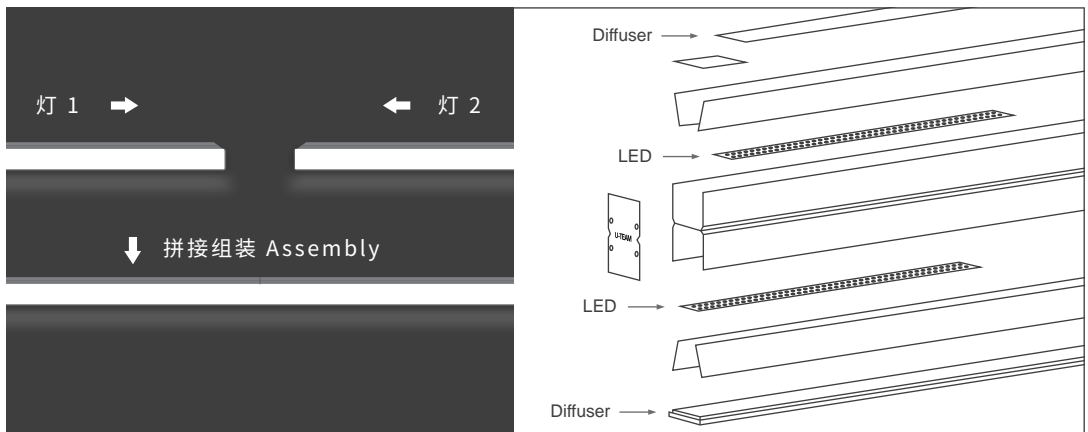

### LAMP FRAME 灯体框架

精致的线条设计，铝材灯体框架，简单又不失大气。不单一的以形式为出发点，而更讲究设计的科学性，一横一竖，棱角分明，极简线条赋予办公空间必要的工作氛围。

Minimalist design with fine detailed metal frame express outstanding quality. Sharp looking with "Talent" inside, echoing hard, competent, agile working atmosphere.

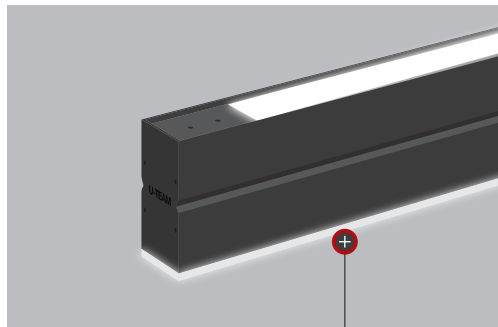


### HIGHLIGHTS 独特设计

亚克力扩散板外飘式的视觉设计，柔和的光边溢出灯框，金属质感的灯体框架与细微的透光边界完美结合，冷静与柔和并蓄，为办公空间烘托出了自由、通透、温柔的氛围。

The protruded-floating acrylic diffuser plate brings the soft light overflow the lamp frame, textured metal frame blend with subtle light-transmission around the edge brings calm but also soft feeling, creates free, transparent and gentle atmosphere in the office.

## OVERVIEW

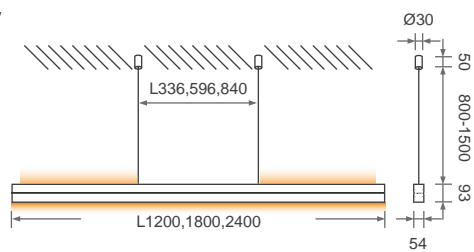









### LINEAR

直条形吊灯 [上下照光型]

Pendent Light [indirect / direct]

透镜射板:5mm阻燃亚克力  
照明光源:Philips 3030 LED  
灯体外壳:铝合金型材,表面喷涂碳灰色或白色

Diffuser: 5mm thick PMMA  
Light source: Philip 3030 LED  
Housing: aluminium profile, finish color is available in graphite or white

基础型号 Basic Model:			LINEAR①.②.③.④		
① 规格说明 Specification	尺寸 size		光源瓦特 (上/下出光) LED watt (indirect / direct)	流明 (上/下出光) Lumen (indirect / direct)	灯具净重 Net Weight
	L1200 x D54 x H93 mm		24 / 36 W	2040 / 2160 Lm	3.8 kg
	L1800 x D54 x H93 mm		36 / 54 W	3060 / 3240 Lm	5.8 kg
	L2400 x D54 x H93 mm		48 / 72 W	4080 / 4320 Lm	7.8 kg
② 光源色温 LED CRI >90 <sup>[4]</sup> DC24V <sup>[9]</sup>	标准配置	Standard	自然白 Neutral-white	4000K	<input checked="" type="checkbox"/>
	* 可选配置	Optional	暖白色 Warm-white	3000K	<input type="checkbox"/>
			冷白色 Cold-white	5000K	<input type="checkbox"/>
③ 亮度控制 Dimming	标准配置	Standard	不可调光 Non dimmable		<input checked="" type="checkbox"/>
	* 可选配置	Optional	可调光0-10V (可通过控制面板调光) Dimmable 0-10V (dimmable by control panel)		<input type="checkbox"/>
A  旋钮控制面板 Knob control panel					
C  触控白色面板 Touch-screen white glass controller panel					
E  12键遥控器 (配有信号模组和无线驱动器) <sup>[13]</sup> 12-key remote control (with signal module and wireless driver)					
B  触控黑色面板 Touch-screen black glass controller panel					
D  触控白色面板, 配有遥控器 Touch-screen white glass controller panel, with remote control					
F  蓝牙远程控制 (通过手机app) Bluetooth remote control through mobile app					
④ 表面处理 Finish	标准颜色	Standard	哑光碳灰色 Matt Graphite		<input checked="" type="checkbox"/>
			哑光纯白色 Matt White		
	定制颜色	Custom finish	MOQ. from 200 pcs		<input type="checkbox"/>
安装方式 Mounting	两点吊装, PVC透明管载流钢缆电线1500mm长 2-point suspension with L1500mm current-carrying steel cables with PVC transparent pipe.  吊顶固定件Ø30xH50mm, 颜色同灯体外壳 Ceiling fixation parts Ø30xH50mm, the color is the same as the lamp housing.				
拼接组装 Assembly	连接套件 (含盖板x2, I型连接件x1, 吊线等) Connector set (including cover plate x2, I-type connector x1, screws etc.)  标准颜色    Standard                      哑光碳灰色 Matt Graphite 哑光纯白色 Matt White				
技术参数 Technical	<b>基本资料</b> Electrical performance [1] 灯具类型 type of lamps: Class I                      [2] 防护等级 safety grade: IP20                      [3] 认证 certificate: CE/CCC/Rohs  <b>光色性能</b> Light color performance [4] 显色指数 color rendering index: CRI>90                      [5] 芯片效率 chip efficiency: 140Lm/W [6] 色容差 color tolerance: SDCM<2                      [7] 上下光束角度 beam angels: indirect 90°/ direct 120°  <b>电器性能</b> Electrical performance [8] 输入电压 input voltage: 220-240VAC, 50/60Hz    [9] 电压等级 voltage level: DC24V                      [10] 恒压电源 voltage power supply [11] 功率因数 power factor: >0.9                      [12] 频闪等级 stroboscopic level: <0.05 [13] 遥控器可以同时控制1-15盏吊灯, 同步开关和调光; 距离要求信号不得超过20m范围。 The remote control can simultaneously control 1-15 lamps with synchronous switch and dimming. The maximum signal distance is 20m.				

■ Standard 标准 □ Optional 可选